

Importing data in txt format

Program:	Spread Footing	
GEO5 file:	Demo_manual_27_1.gpa	(example ready for importing)
	Demo_manual_27_2.gpa	(example after importing)
TXT file:	Demo_import.txt	(txt file for importing)
	Demo_import_re.txt	(txt file for re-importing)

The aim of this engineering manual is to show how to import a load list in the txt format into the program Spread Footing.

Introduction

Txt import is already mentioned in engineering manual [No. 9 \(Design of the geometry of a spread footing\)](#). In this manual the complete working of the program *Spread Footing* is also shown.


A text file in which we have entered the loads, was obtained from a static program using export. Currently, you can export the load from most of the commercially available static programs (eg. SCIA, Dlubal, FIN EC...).

The main advantage of importing text data into GEO5 programs is its versatility. The user can choose exactly which data he wishes to insert and how he wishes to insert them. The program allows the user to skip unnecessary lines, change the order of the columns, or multiply them by any factor.

In addition to various modifications of the input data, users will also appreciate the possibility of repeating the whole process. The program remembers all of the user settings and when the user imports another file in the same format, everything is done automatically.

Basic investigation of the file

The text file *demo_import.txt* displayed in a text editor looks as follows.

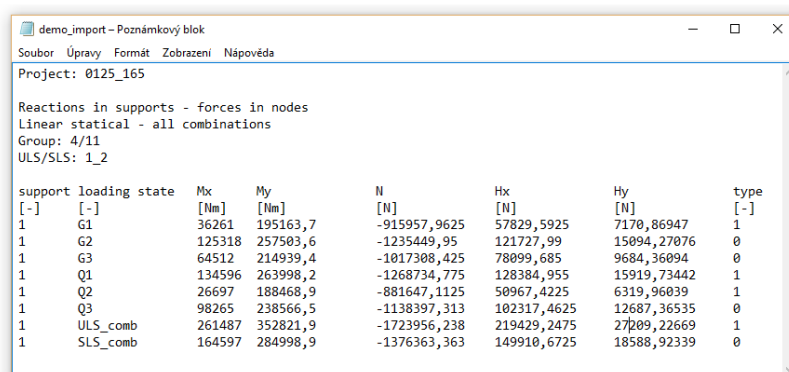

```

demo_import - Poznámkový blok
Soubor Úpravy Formát Zobrazení nápověda
Project: 0125_165
Reactions in supports - forces in nodes
Linear statical - all combinations
Group: 4/11
ULS/SLS: 1_2

support loading state Mx My N Hx Hy type
[-] [-] [Nm] [Nm] [N] [N] [N] [-]
1 G1 36261 195163,7 -915957,9625 57829,5925 7170,86947 1
1 G2 125318 257503,6 -1235449,95 121727,99 15094,27076 0
1 G3 64512 214939,4 -1017308,425 78099,685 9684,36094 0
1 Q1 134596 263998,2 -1268734,775 128384,955 15919,73442 1
1 Q2 26697 188468,9 -881647,1125 50967,4225 6319,96039 1
1 Q3 98265 238566,5 -1138397,313 102317,4625 12687,36535 0
1 ULS_comb 261487 352821,9 -1723956,238 219429,2475 27209,22669 1
1 SLS_comb 164597 284998,9 -1376363,363 149910,6725 18588,92339 0
    
```

Preview of the input file in a text editor

The layout of our input file does not match the format of the load, which is used in the GEO5 programs. At first glance, we can notice a few differences, which must be eliminated using import settings.


- 1) Unnecessary columns
- 2) The order of the columns
- 3) Units - in the program [kN] must be entered, in the txt file are [N]
- 4) The opposite sign convention for the vertical force

Importing data in the program Spread Footing

In the program “Spread Footing”, we press the button “Import” in the frame “Load”.

No.	Load new change	Load name	N [kN]	M _x [kNm]	M _y [kNm]	H _x [kN]	H _y [kN]	Design
Applied forces								


Frame “Load”

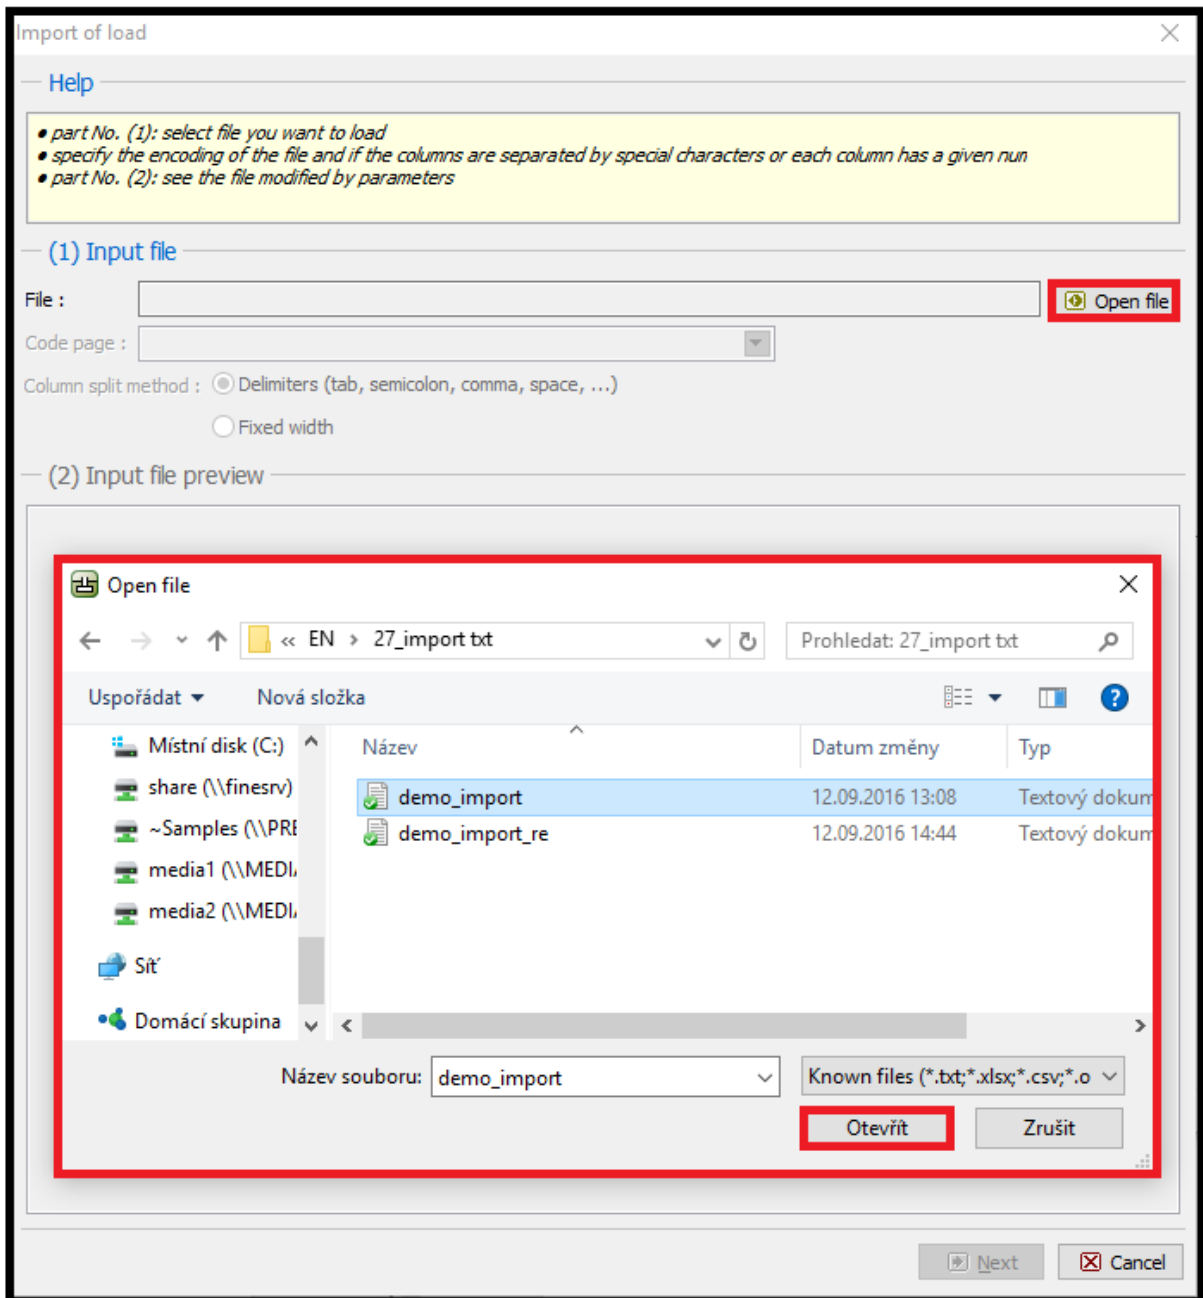

Dialog window "Import of load"

After opening the file, the text data are previewed directly in the import dialog window.

The program usually automatically detects the appropriate column distribution in the input file. In case it does not correct the distribution automatically, the user can specify the type of delimiters manually.

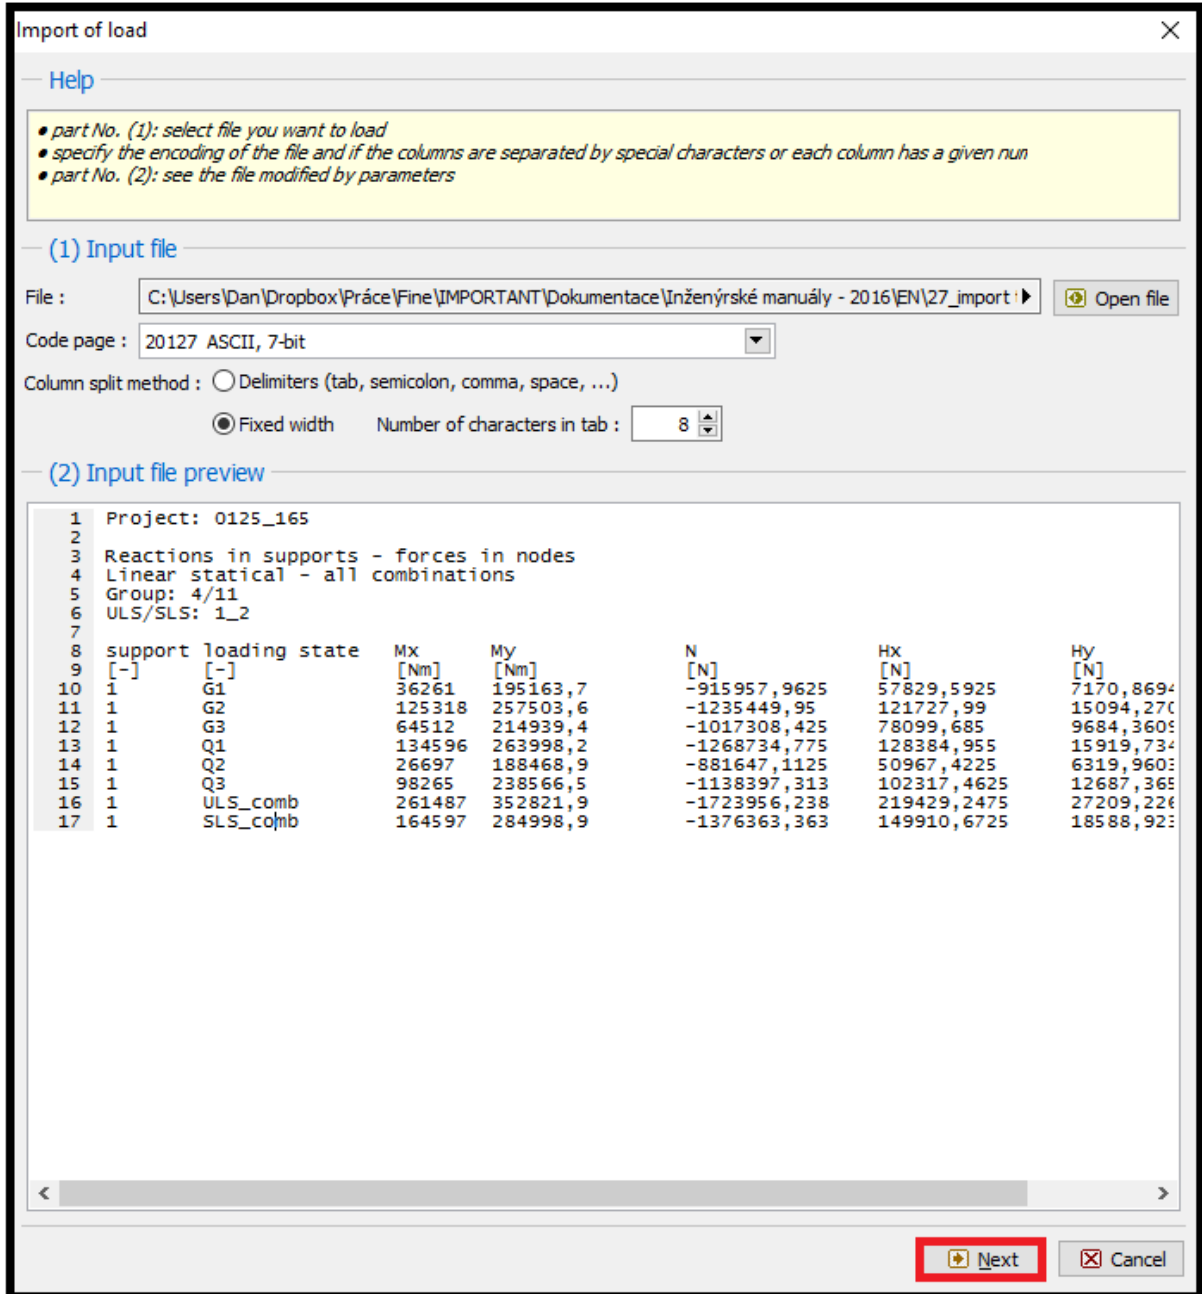

Input file preview in the dialog window "Import of load"

We can open additional settings for the imported file by pressing the "Next" button.

In the upper part (2) of the dialog window the input file is previewed without any modifications. Parameters for splitting the columns to the correct layout are set in the middle part (3). The input file in the new correct layout is shown at the bottom (4)

Import of load
✕

Help

- part No. (2): see the modified input file
- part No. (3): possibly modify the parameters of the splitting file into columns
- part No. (4): see the input file split into columns

(2) Input file preview

```

1 Project: 0125_165
2
3 Reactions in supports - forces in nodes
4 Linear statical - all combinations
5 Group: 4/11
6 ULS/SLS: 1_2
7
8 support loading state Mx My N Hx Hy
9 [-] [-] [Nm] [Nm] [N] [N] [N]
10 1 G1 36261 195163,7 -915957,9625 57829,5925 7170,8
11 1 G2 125318 257503,6 -1235449,95 121727,99 15094,
12 1 G3 64512 214939,4 -1017308,425 78099,685 9684,3
13 1 Q1 134596 263998,2 -1268734,775 128384,955 15919,
14 1 Q2 26697 188468,9 -881647,1125 50967,4225 6319,9
15 1 Q3 98265 238566,5 -1138397,313 102317,4625 12687,36535

```

(3) Parameters for input file splitting into columns

Read from row : to row : Header from row : to row : Analyze columns

Columns in the file :

A	B	C	D	E	F	G	H
8	16	8	16	16	16	16	4

(4) Input file split into columns

A	B	C	D	E	F	G	H
(123)	(ABCDEFG)	(123)	(123,45)	(123,45)	(123,45)	(123,45)	(123)
support [-]	loading state [-]	Mx [Nm]	My [Nm]	N [N]	Hx [N]	Hy [N]	type [-]
1	G1	36261	195163,7	-915957,9625	57829,5925	7170,86947	1
1	G2	125318	257503,6	-1235449,95	121727,99	15094,27076	0
1	G3	64512	214939,4	-1017308,425	78099,685	9684,36094	0
1	Q1	134596	263998,2	-1268734,775	128384,955	15919,73442	1
1	Q2	26697	188468,9	-881647,1125	50967,4225	6319,96039	1
1	Q3	98265	238566,5	-1138397,313	102317,4625	12687,36535	0
1	ULS_comb	261487	352821,9	-1723956,238	219429,2475	27209,22669	1
1	SLS_comb	164507	284008,0	-1276363,363	140010,6775	18588,02320	0

Dialog window "Import of load" – splitting the input file into columns

Modifications:

In the middle part we made an additional reading data setting.

We skipped the upper lines with general information about the file and set the header of all the entered data.

By clicking the “Next” button a new window with three parts is displayed. In the upper part (4), the input file divided into columns is shown. The setting of data in each column is performed in the middle part (5) and in the bottom (6) part the result of the import is previewed.

✕
Import of load

[Help](#)

- part No. (4): see the input file split into columns
- part No. (5): modify the assignment to columns that data will be transmitted to, and enter the multiplier and other par.
- part No. (6): see the data that will be passed to the program

[\(4\) Input file split into columns](#)

A (123)	B (ABCDEFG)	C (123)	D (123,45)	E (123,45)	F (123,45)	G (123,45)	H (123)
support [-]	loading state [-]	Mx [Nm]	My [Nm]	N [N]	Hx [N]	Hy [N]	type [-]
1	G1	36261	195163,7	-915957,9625	57829,5925	7170,86947	1
1	G2	125318	257503,6	-1235449,95	121727,99	15094,27076	0
1	G3	64512	214939,4	-1017308,425	78099,685	9684,36094	0
1	Q1	134596	263998,2	-1268734,775	128384,955	15919,73442	1
1	Q2	26697	188468,9	-881647,1125	50967,4225	6319,96039	1
1	Q3	98265	238566,5	-1138397,313	102317,4625	12687,36535	0

[\(5\) Assign columns to imported data](#)

Name	Vertical force N [kN]	Bending moment M _x [kNm] M _y [kNm]		Horizontal force H _x [kN] H _y [kN]		Design
B: loading state ▾	E: N [N] ▾	C: Mx [Nm] ▾	D: My [Nm] ▾	F: Hx [N] ▾	G: Hy [N] ▾	H: type [-] ▾
	-1,000E-03	1,000E-03	1,000E-03	1,000E-03	1,000E-03	Assignment

[\(6\) Result of import preview](#)

Name	Vertical force N [kN]	Bending moment M _x [kNm] M _y [kNm]		Horizontal force H _x [kN] H _y [kN]		Design
G1	915,96	36,26	195,16	57,83	7,17	Yes
G2	1235,45	125,32	257,50	121,73	15,09	No
G3	1017,31	64,51	214,94	78,10	9,68	No
Q1	1268,73	134,60	264,00	128,38	15,92	Yes
Q2	881,65	26,70	188,47	50,97	6,32	Yes
Q3	1138,40	98,27	238,57	102,32	12,69	No
ULS_comb	1723,96	261,49	352,82	219,43	27,21	Yes
SLS_comb	1376,36	164,60	285,00	149,91	18,59	No

⏪ Previous OK Cancel

Dialog window “Import of load” – assigning the columns to imported data

Modifications:

Firstly, in the middle section, we assigned each column from the text file to the correct component of the acting load. That way we achieved the right order of imported data.

The next important thing was changing the format of all columns to $1,00E-03$. We divided the data by thousand in order to change the units from N to kN .

The last modification was changing the sign convention in the vertical force column. We changed the data format to $-1,00E-03$.

The “H” column determines if the imported load acts as the design. In our example, value “1” means YES and value “0” means NO. This information can be set after clicking on the “Assignment” button in the middle part of the window.

Import of load

Help

- part No. (4): see the input file split into columns
- part No. (5): modify the assignment to columns that data will be transmitted to, and enter the multiplier and other par.
- part No. (6): see the data that will be passed to the program

(4) Input file split into columns

A (123) support [-]	B (ABCDEFGG) loading state [-]	C (123) Mx [Nm]	D (123,45) My [Nm]	E (123,45) N [N]	F (123,45) Hx [N]	G (123,45) Hy [N]	H (123) type [-]
1	G1	36261	195163,7				
1	G2	125318	257503,6				
1	G3	64512	214939,4				
1	Q1	134596	263998,2				
1	Q2	26697	188468,9				
1	Q3	98265	238566,5				

Enum value assignment

	Value
in the file	in the result
0	No
1	Yes

(5) Assign columns to imported data

Name	Vertical force N [kN]	Bending moment M _x [kNm] M _y [kNm]		Horizontal force H _x [kN] H _y [kN]		Design
B: loading state ▾	E: N [N] ▾	C: Mx [Nm] ▾	D: My [Nm] ▾	F: Hx [N] ▾	G: Hy [N] ▾	H: type [-] ▾
	-1,000E-03	1,000E-03	1,000E-03	1,000E-03	1,000E-03	Assignment

(6) Result of import preview

Name	Vertical force N [kN]	Bending moment M _x [kNm] M _y [kNm]		Horizontal force H _x [kN] H _y [kN]		Design
G1	915,96	36,26	195,16	57,83	7,17	Yes
G2	1235,45	125,32	257,50	121,73	15,09	No
G3	1017,31	64,51	214,94	78,10	9,68	No
Q1	1268,73	134,60	264,00	128,38	15,92	Yes
Q2	881,65	26,70	188,47	50,97	6,32	Yes
Q3	1138,40	98,27	238,57	102,32	12,69	No
ULS_comb	1723,96	261,49	352,82	219,43	27,21	Yes
SLS_comb	1376,36	164,60	285,00	149,91	18,59	No

Previous OK Cancel

Dialog window “Import of load” – splitting the input file into columns

This was the last step of the txt data import. We accept all settings by pressing the “OK” button and preview the result of the import in the frame “Load”.

The screenshot displays the GEO5 software interface. The top part shows a 2D cross-section of a foundation with dimensions: a width of 100,00, a height of 2,50, and a depth of 1,00. The foundation is shown in a grey stippled pattern. The ground surface is labeled 'OG' and the foundation top is 'FG'. A vertical axis 'z' is shown on the right. The bottom part of the screenshot shows a table of applied forces with the following data:

No.	Load new	change	Load name	N [kN]	M _x [kNm]	M _y [kNm]	H _x [kN]	H _y [kN]	Design
1	Yes		G1	915,96	36,26	195,16	57,83	7,17	✓
2	Yes		G2	1235,45	125,32	257,50	121,73	15,09	✓
3	Yes		G3	1017,31	64,51	214,94	78,10	9,68	✓
4	Yes		Q1	1268,73	134,60	264,00	128,38	15,92	✓
5	Yes		Q2	881,65	26,70	188,47	50,97	6,32	✓
6	Yes		Q3	1138,40	98,27	238,57	102,32	12,69	✓
7	Yes		ULS_comb	1723,96	261,49	352,82	219,43	27,21	✓
8	Yes		SLS_comb	1376,36	164,60	285,00	149,91	18,59	✓

Frame “Load” – result of the import

We can see that the import was successful. All components of the acting load were transferred to the program *GEO5 Spread Footing*.

Re-import

In the case that we import table data more frequently, we will appreciate the automatization of the whole process. All our modifications are repeated automatically when importing again. The user does not have to set anything further. To show this function, we will import a file named *Demo_import_re.txt*. This file is in the same format as the file *Demo_import.txt*, which was already imported above.

We choose the option “Import” again. The whole process of setting the import will be left unchanged up until the last dialog window, which looks as follows:

✕
Import of load

[Help](#)

- part No. (4): see the input file split into columns
- part No. (5): modify the assignment to columns that data will be transmitted to, and enter the multiplier and other par.
- part No. (6): see the data that will be passed to the program

[\(4\) Input file split into columns](#)

A (123) support [-]	B (ABCDEFG) loading state [-]	C (123) Mx [Nm]	D (123,45) My [Nm]	E (123,45) N [N]	F (123,45) Hx [N]	G (123,45) Hy [N]	H (123) type [-]
2	W1	24512	186939,4	-873808,425	49399,685	6125,56094	1
2	W2	113269	249069,3	-1192224,163	113082,8325	14022,27123	1
2	W3	62151	213286,7	-1008838,338	76405,6675	9474,30277	1
2	Q1	124367	256837,9	-1232038,238	121045,6475	15009,66029	1
2	Q2	19867	183687,9	-857144,4875	46066,8975	5712,29529	1
2	G1	87214	230830,8	-1098751,85	94388,37	11704,15788	0

[\(5\) Assign columns to imported data](#)

Name	Vertical force N [kN]	Bending moment M _x [kNm] M _y [kNm]		Horizontal force H _x [kN] H _y [kN]		Design
B: loading state ▼	E: N [N] ▼	C: Mx [Nm] ▼	D: My [Nm] ▼	F: Hx [N] ▼	G: Hy [N] ▼	H: type [-] ▼
	-1,000E-03	1,000E-03	1,000E-03	1,000E-03	1,000E-03	Assignment

[\(6\) Result of import preview](#)

Name	Vertical force N [kN]	Bending moment M _x [kNm] M _y [kNm]		Horizontal force H _x [kN] H _y [kN]		Design
W1	873,81	24,51	186,94	49,40	6,13	Yes
W2	1192,22	113,27	249,07	113,08	14,02	Yes
W3	1008,84	62,15	213,29	76,41	9,47	Yes
Q1	1232,04	124,37	256,84	121,05	15,01	Yes
Q2	857,14	19,87	183,69	46,07	5,71	Yes
G1	1098,75	87,21	230,83	94,39	11,70	No
ULS_comb	1580,42	221,48	324,82	190,72	23,65	Yes
SLS_comb	1310,48	146,23	272,14	136,73	16,95	No

⏪ Previous ✔ OK ✕ Cancel

Dialog window “Import of load” – assigning the columns to imported data

We can see, that the program remembered all the settings that we made during the previous import of data (order of columns, change of units and change of the vertical force sign convention).

After confirming by pressing the “OK” button we see the successfully imported data in the table of acting loads.

The screenshot displays the GEO5 software interface. The top part shows a 2D cross-section of a foundation with dimensions: a width of 2.50, a height of 1.00, and a depth of 2.00. The ground level is marked as OG and the foundation top as FG. A vertical axis is shown on the right. The bottom part of the screenshot shows a table of applied forces with the following data:

No.	Load new	Load change	Load name	N [kN]	M _x [kNm]	M _y [kNm]	H _x [kN]	H _y [kN]	Design
1	Yes		W1	873,81	24,51	186,94	49,40	6,13	✓
2	Yes		W2	1192,22	113,27	249,07	113,08	14,02	✓
3	Yes		W3	1008,84	62,15	213,29	76,41	9,47	✓
4	Yes		Q1	1232,04	124,37	256,84	121,05	15,01	✓
5	Yes		Q2	857,14	19,87	183,69	46,07	5,71	✓
6	Yes		G1	1098,75	87,21	230,83	94,39	11,70	✓
7	Yes		ULS_comb	1580,42	221,48	324,82	190,72	23,65	✓
8	Yes		SLS_comb	1310,48	146,23	272,14	136,73	16,95	✓

The frame “Load” – result of re-importing

Conclusion

Importing table data to the GEO5 programs is unique in its versatility. The user can select in detail which data and in what format he wishes to import.

Another important advantage of the whole process is automatization. In case the user imports data in a specific format repeatedly, the program will remember this process and next time everything will be set automatically.

Note: The process of importing table data is also explained in the program help (F1 or online: <http://www.fine.cz/napoveda/geo5/en/table-data-import-01/>)