


## 1 Project

Section name : Ocelový svařenec: U 200 + L 200x200x14

## 2 Input data

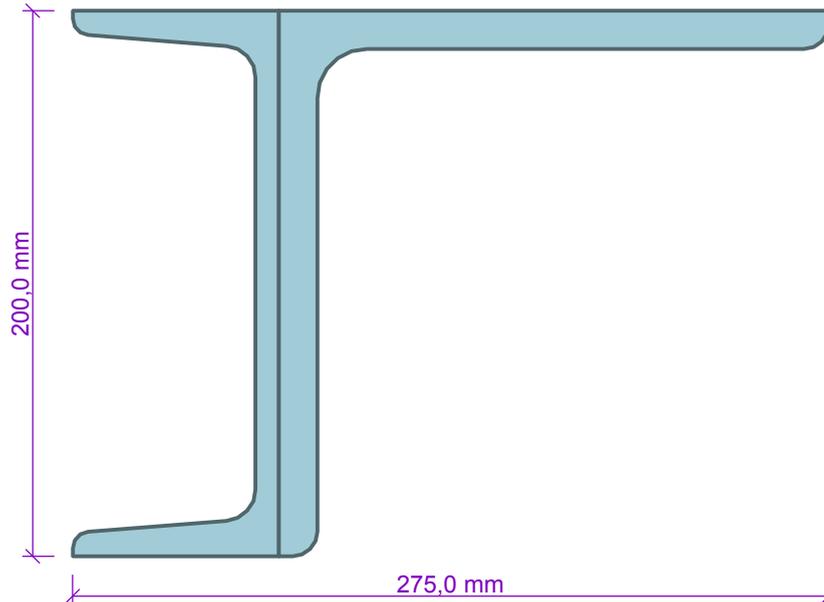

### 2.1 Section objects

| no. | Type    | Description      | Material          | Area [mm <sup>2</sup> ] | Elastic modulus [MPa] |
|-----|---------|------------------|-------------------|-------------------------|-----------------------|
| 1   | Profile | U(UPN) 200       | EN 10025 : Fe 360 | 3220,0                  | 210000,0              |
| 2   | Profile | L 200 x 200 x 14 | EN 10025 : Fe 360 | 5440,0                  | 210000,0              |

### 2.2 Section object parameters

**Object no.1:** U(UPN) 200

Centre of gravity position [mm]: [0,0 , 0,0]; rotation: 180,0°

**Object no.2:** L 200 x 200 x 14

Centre of gravity position [mm]: [74,4 , 45,7]; rotation: -90,0°

## 3 Results

Table of values

|  |  |
|--|--|
| Real sectional characteristics calculated.   |  |
| Position of centre of gravity with respect to global coordinate system               |  |
| horizontal position of centre of gravity with respect to origin of coordinate system | x = 46,7 mm                                |
| vertical position of centre of gravity with respect to origin of coordinate system   | y = 28,7 mm                                |
| Cross-sectional characteristics  |  |
| cross-sectional area   | A = 8660,0 mm <sup>2</sup>                 |
| cross-section perimeter  | P = 1444,9 mm                              |
| distance of centroid from left edge of min. cross-section envelope                   | y <sub>cg</sub> = 101,6 mm                 |
| distance of centroid from bottom edge of min. cross-section envelope                 | z <sub>cg</sub> = 128,7 mm                 |
| moment of inertia w.r.t. horizontal centroidal axis                                  | I <sub>y</sub> = 44,12E+06 mm <sup>4</sup> |



Table of values

|  |                                    |
|--|------------------------------------|
| moment of inertia w.r.t. vertical centroidal axis                                | $I_z = 33,48E+06 \text{ mm}^4$     |
| mixed moment of inertia w.r.t. centroidal axes                                   | $D_{yz} = 19,08E+06 \text{ mm}^4$  |
| inclination of principal centroidal axes   | $\phi = -37,2^\circ$               |
| radius of gyration normal to horizontal centroidal axis                          | $i_y = 71,4 \text{ mm}$            |
| radius of gyration normal to vertical centroidal axis                            | $i_z = 62,2 \text{ mm}$            |
| moment of inertia w.r.t. principal Y-axis  | $I_{yh} = 58,61E+06 \text{ mm}^4$  |
| moment of inertia w.r.t. principal Z-axis  | $I_{zh} = 18,99E+06 \text{ mm}^4$  |
| radius of gyration normal to principal Y-axis                                    | $i_{yh} = 82,3 \text{ mm}$         |
| radius of gyration normal to principal Z-axis                                    | $i_{zh} = 46,8 \text{ mm}$         |
| rigidity moment in simple torsion  | $I_k = 492,0E+03 \text{ mm}^4$     |
| polar moment of inertia  | $I_p = 77,60E+06 \text{ mm}^4$     |
| polar moment of inertia  | $i_p = 94,7 \text{ mm}$            |
| cross-sectional modulus w.r.t. centroidal y-axis at upper edge of cross-section  | $W_{y1} = 618,9E+03 \text{ mm}^3$  |
| cross-sectional modulus w.r.t. centroidal y-axis at bottom edge of cross-section | $W_{y2} = -342,8E+03 \text{ mm}^3$ |
| cross-sectional modulus w.r.t. centroidal z-axis at right edge of cross-section  | $W_{z1} = -193,1E+03 \text{ mm}^3$ |
| cross-sectional modulus w.r.t. centroidal z-axis at left edge of cross-section   | $W_{z2} = 329,4E+03 \text{ mm}^3$  |